



راهنمای نصب درایور چاپگر POS58L در حالت چاپ لیبیل:


ابتدا فایل PrnInst.exe را اجرا نمایید. در پنجره باز شده، بر روی گزینه Next کلیک نمایید.

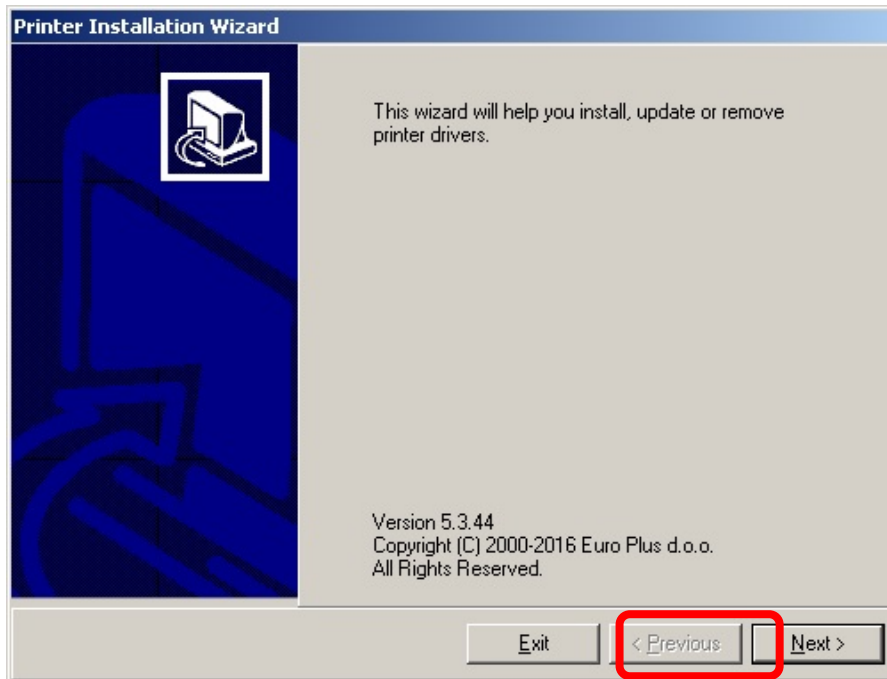


در پنجره بعد بر روی گزینه **Install Printer Driver** کلیک نمایید.

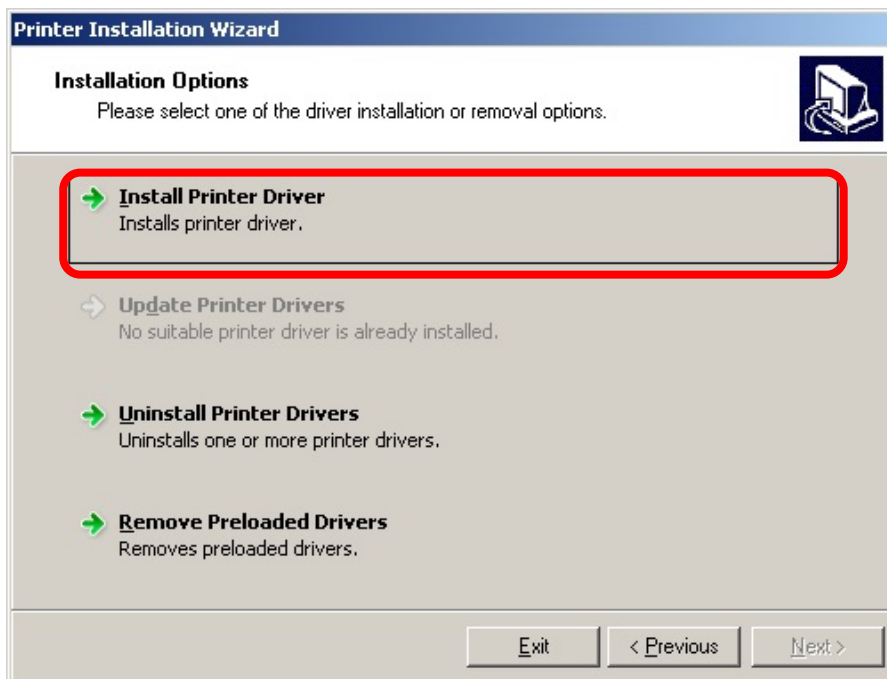


در پنجره بعد بر روی گزینه ی **Other** کلیک کنید.

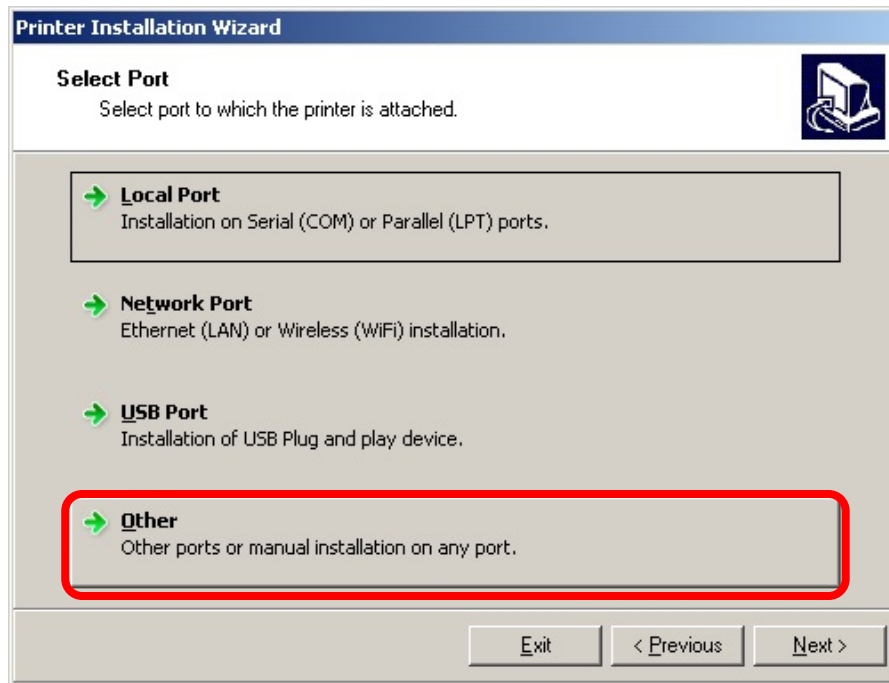

در پنجره بعد نام چاپگر را با عنوان **SPRT 2L2X** انتخاب نموده و بر روی گزینه ی **Next** کلیک کنید.

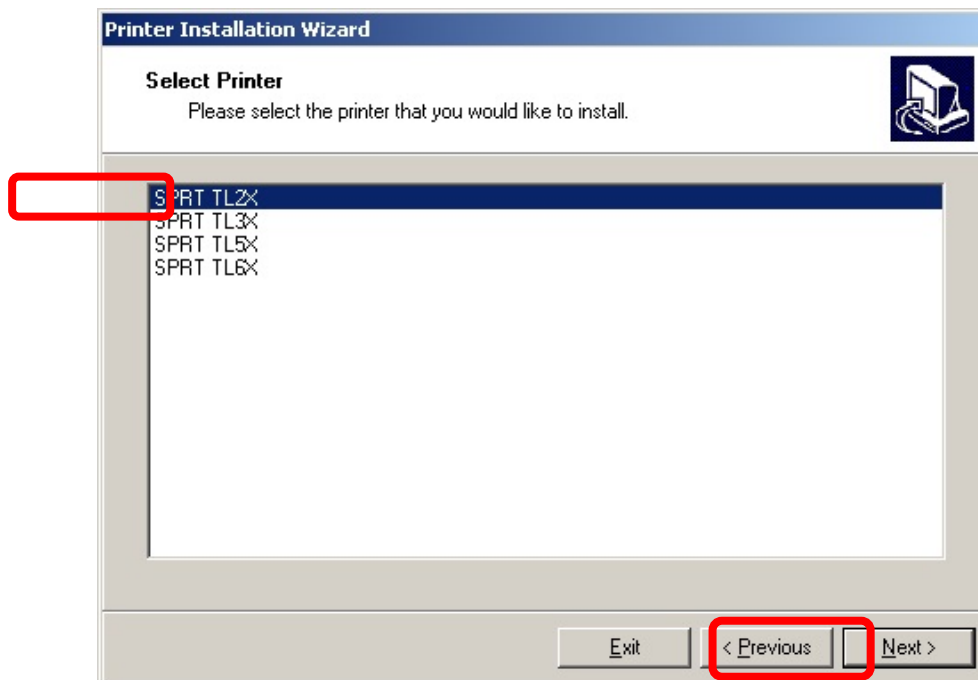


در پنجره بعد بر روی گزینه **Next** کلیک کنید. در پنجره بعد نام پرینتر را مانند تصویر زیر تغییر دهید و بر روی گزینه **Install** کلیک کنید.

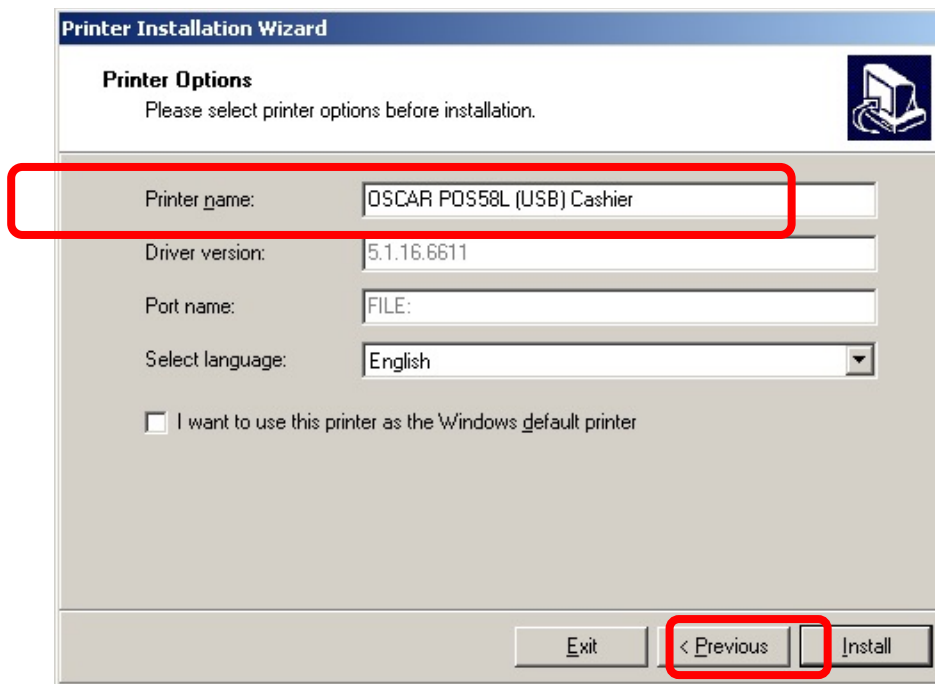

The screenshot shows the 'Printer Installation Wizard' window, specifically the 'Printer Options' step. The window title is 'Printer Installation Wizard'. Below the title bar, there is a sub-header 'Printer Options' and the instruction 'Please select printer options before installation.' The main area contains several fields: 'Printer name:' with the value 'OSCAR POS58L (USB) Cashier', 'Driver version:' with '5.1.16.6611', 'Port name:' with 'FILE:', and 'Select language:' with a dropdown menu set to 'English'. There is an unchecked checkbox labeled 'I want to use this printer as the Windows default printer'. At the bottom, there are three buttons: 'Exit', '< Previous', and 'Install'. The 'Printer name' field and the '< Previous' button are highlighted with red rectangles.

پس از اتمام مراحل نصب، با باز شدن پنجره زیر، بر روی گزینه **Exit** کلیک کنید.

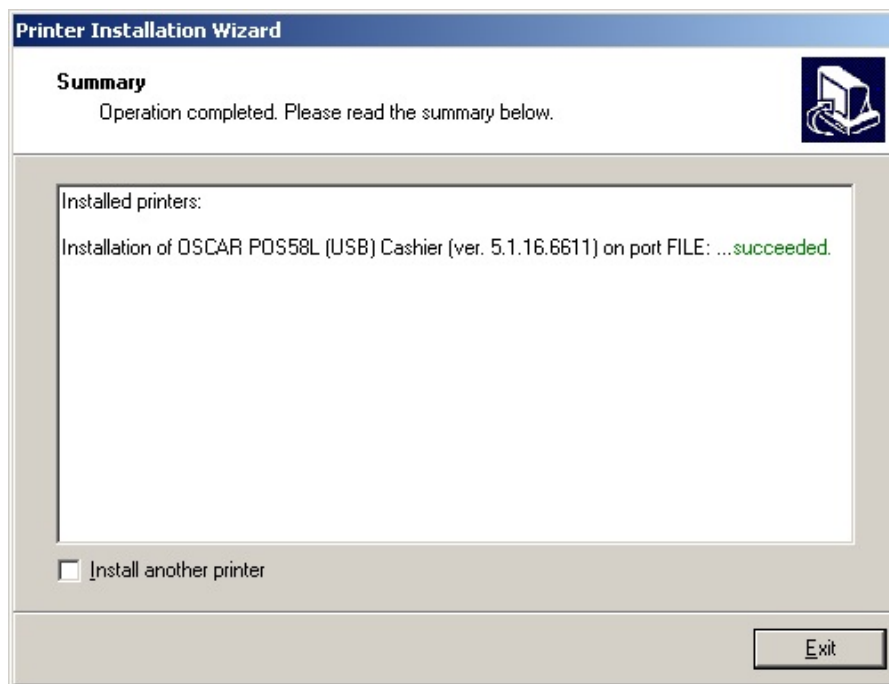

The screenshot shows the 'Printer Installation Wizard' window, specifically the 'Summary' step. The window title is 'Printer Installation Wizard'. Below the title bar, there is a sub-header 'Summary' and the instruction 'Operation completed. Please read the summary below.' The main area contains a text box with the following text: 'Installed printers:' followed by 'Installation of OSCAR POS58L (USB) Cashier (ver. 5.1.16.6611) on port FILE: ...succeeded.' There is an unchecked checkbox labeled 'Install another printer'. At the bottom right, there is an 'Exit' button.

بعد از اتمام نصب، در قسمت تنظیمات چاپگر هایوبندوز، پورت **LPT** را به پورت ساخته شده ی **USB** تغییر دهید.